




536FLS FORD LOWERING SHACKLES

2" DROP

1. This No Limit Shackle will lower the rear of your truck about 1-1 1/2" or 2". By doing a few other things, you can lower your truck up to 6" and still have a good ride.
2. The Shackle. The shackles are made by a direct replacement of the stock shackle. Replace the stock steel spring bushing with the new bushings in the kit. The lower bushing and pin in the shackle are the same as the stock F-100 part. The lower bushing may have to be honed (use a brake cylinder hone) just as if you were putting new bushings in the stock shackle. When the pin fits nice, put the shackle into the stock hanger and bolt in the spring.
DO NOT OVER TIGHTEN THE SPRING EYE BOLT AND SQUISH THE NEW BUSHING

4" SLAM

3. The forward hanger. By moving the forward spring mount up to the top edge of the frame, you can lower the truck another 2". Cut off the rivets and move the mount straight up. Drill new holes in the frame and bolt the mounts on.
USE GRADE 8 BOLTS AND LOCKNUTS

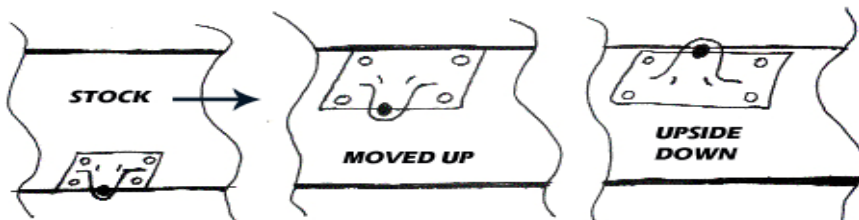

6" SUPER SLAM

4. Reverse eye springs. By reversing the spring eye position on the main leaf, you can drop another 2". This is done at a spring shop. **DO NOT JUST FLIP THE MAIN LEAF OVER. . . THIS WILL NOT WORK!**

NOTE: The second leaf will have to be cut short. Cut 1" off each end. - - Do not use a torch - - IF you are going for the 'Super Slam', put the mount on upside down. This will help give the spring the room it needs.